

MEDIUM FLUSH NEXGEN-HYBRID™ WOOD BURNING INSERTS



**THIS MODEL QUALIFIES FOR THE 30% USA TAX CREDIT
ON THE PURCHASE, VENTING AND INSTALLATION COSTS**
PLEASE CONSULT WITH YOUR TAX ADVISOR TO CONFIRM YOUR ELIGIBILITY FOR THIS TAX CREDIT

THE MEDIUM WOOD INSERT YOU ARE GOING TO LOVE

The Medium Flush NexGen-Hybrid™ Wood Insert is a great option for those looking to upgrade their old, inefficient fireplace. It features a sleek, flush design with a big, beautiful fire viewing area and concealed convection fans that increase the transfer and circulation of heat throughout your home.


NexGen-Hybrid™ Technology provides cleaner, longer burns, higher efficiencies and more heat into your home. This makes the Medium Flush NexGen-Hybrid™ Wood Insert one of the most efficient and cost effective ways to heat your home, even if the power goes out.

Here are just a few benefits you'll love about the Medium Flush NexGen-Hybrid™ Insert:

- Cleaner burns and higher efficiencies mean less smoke and trips to the wood pile.
- Generous 2.2 cubic foot firebox holds logs up to 24 inches long, allowing for 10 hour burn times.
- Bypass damper helps to prevent smoke-backs during loading and reloading.
- Single operation air control gives you full range of control over the burn rate (low, medium, and high)
- Huge fire viewing area with beautiful arched and rectangular door designs.
- The optional GreenStart® Igniter makes starting your insert as easy as pushing a button!



Learn More About
NexGen-Hybrid™
Technology

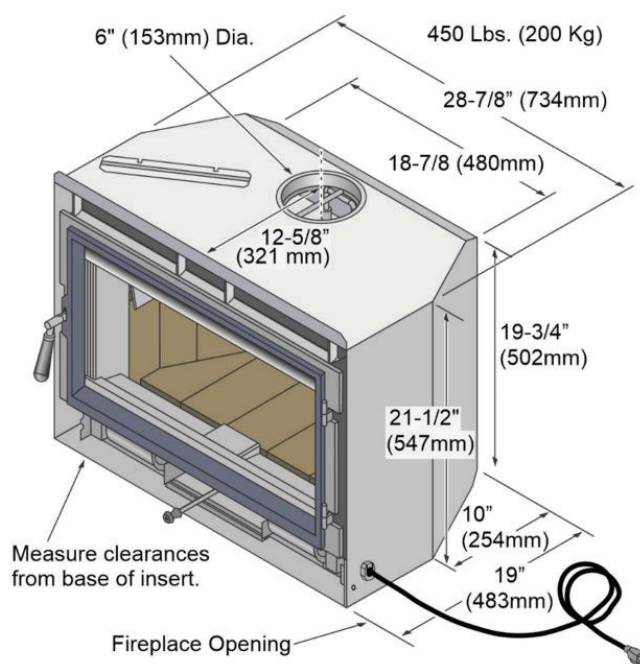

*GreenStart® Igniter option requires additional firebox width measured 3" from front of fireplace opening.

SPECIFICATIONS

Heating Capacity*:	1,200 to 2,000 Square Feet
Cord Wood BTU's:	14,500 to 70,000 BTUs Per Hour
Crib Wood BTU's:	11,076 to 39,456 BTUs Per Hour
Emissions:	1.2 Grams/Hr. (Crib Wood)
HHV Overall Efficiency:**	Up to 77%
Maximum Burn Time:	Up to 10 Hours
Firebox Size:	2.2 Cubic Feet
Maximum Log Size:	24 Inches
Weight:	450 Pounds
Construction:	5/16" to 1/4" Steel Plate
Glass Viewing Area:	22-5/8" W x 10" H
	216 Sq. In. Arched Door
	227 Sq. In. Rectangular Door

* Heating capacity may vary depending on degree of home insulation, floor plan and ambient temperature zone of the area you live.

**As tested using B-415.1 using Cord Wood. HHV = High Heat Value

OPTIONS

- Insert Wiring Kit
- **GREEN START™** Igniter. Light your fire with the push of a button!

RECTANGULAR DOOR FACE OPTIONS



Universal Face
Metallic Black paint finish
33-3/8 W x 23-1/4 H



Times Square™ Face
Metallic Black paint finish
35-3/4 W x 22-1/4 H




Metropolitan™ Face
Metallic Black paint finish
33-3/8" W x 23-1/4" H




Shadowbox™ Face
Metallic Black paint finish
35-3/4" W x 22-1/8" H

CLEARANCES TO UNPROTECTED COMBUSTIBLES

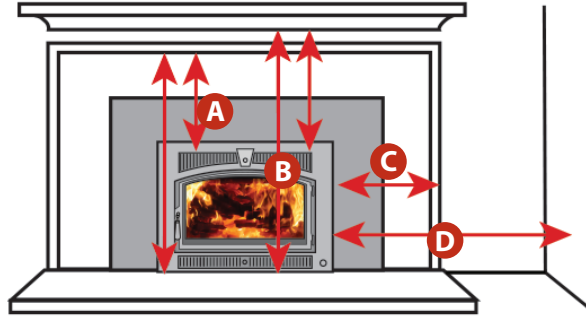

	Masonry	Metal (ZC)
A = Insert Base to Mantel	41-1/2"	41-1/2"
B = Insert Base to Top Facing	39"	39"
C = Firebox Side to Side Facing	9"	9"
D = Firebox Side to Side Wall	9"	9"

SIZING YOUR FIREPLACE FOR AN INSERT

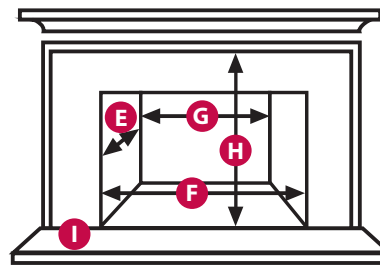

Your Fireplace Measurements

E = Depth	_____
F = Front Width	_____
G = Back Width	_____
H = Height	_____
I = Hearth Depth	_____

Please use the provided chart above to mark down your fireplace dimensions. This will assist you in determining the right insert for your fireplace.

Approved ZC Fireplaces: See the Owner's Manual for details.

ARCHED DOOR FACE OPTIONS



Wilmington™ Face
Metallic Black paint finish
35-3/8 W x 23-1/4 H



Classic Arch™ Face
Metallic Black paint finish
33-1/4" W x 23-3/4" H